
Satisfy Professional's Needs



# Cordless Circular Saw DHS661/DHS660 165 mm (6-1/2")



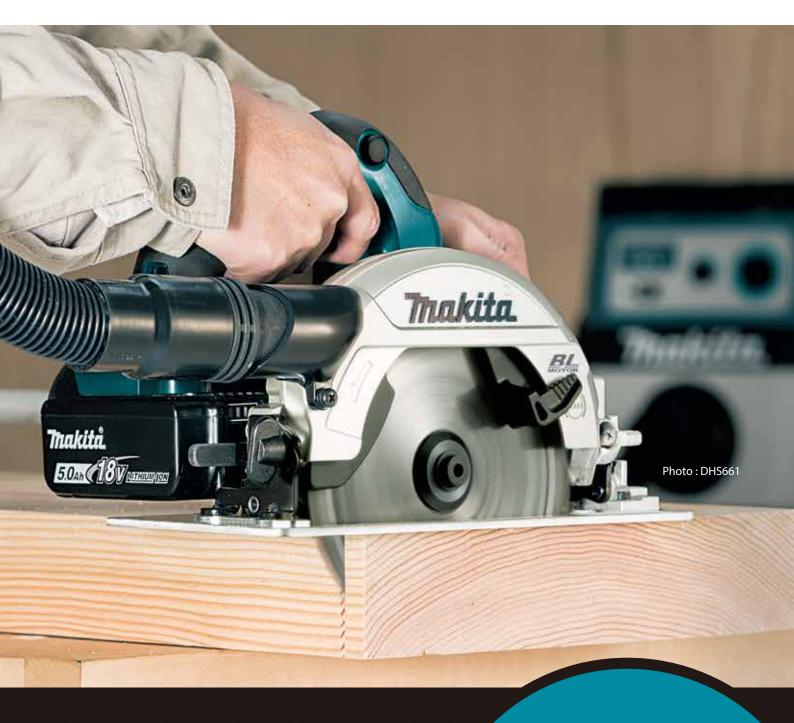

## **Compact and Lightweight**

/L/ITHIUM#[ON]





Predecessor Model 350mm

DHS661 / DHS660 270mm

-80mm

## **Compact with Only 270 mm (10-5/8")** Length for Better Maneuverability





**Rear dust** 

exhaust port



## Work amount

Test material: SPF of 2 x 10 (38mm x 235mm) Bevel angle: 0° Battery: BL1850B (on a single full battery charge)



### **Twin LED Job light**







O(OF



**Auto-start Wireless System** (DHS661 only)

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



Wireless unit is compatible with all supported tools

#### 🚯 Bluetooth" AWS connects to power tool with Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

## **Cordless Circular Saw**

DHS661 / DHS660 165 mm (6-1/2")		
Me Brake	Blade Diameter	165 mm (6-1/2")
	Hole Diameter	15.88 / 20 mm (5/8" / 13/16")
Soft Start	Max Cutting Capacity	90°: 57 mm (2-1/4"), 45°: 41 mm (1-5/8")
		50°: 37 mm (1-7/16")
Here The Dust Collection	No Load Speed (RPM)	5,000
	Vibration Level	Cutting Wood: 2.5 m/s <sup>2</sup> or less
Built-in Job Light	Sound Pressure Level	93 dB(Ā)
	Sound Power Level	104 dB(A)
Carrying Case	Dimensions (L x W x H)	270x186x250 mm(10-5/8"x7-3/8"x9-7/8")
	Net weight	DHS661 : 2.9 - 3.2 kg (6.4 - 7.1 lbs.)
		DHS660 : 2.9 - 3.2 kg (6.3 - 7.0 lbs.)
Standard Equipment: TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule),		

Dust Nozzle (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

### Flat motor housing design

Increases stability when changing blades.



### Bevel cuts up to 50 degrees



Accessories Specialized EFFICUT blade




Size (mm) Part No. 165 x 1.4 x 20 x 25T B-62979 165 x 1.45 x 20 x 56T B-57364



Part No. 199232-5

**Tool hanger** 






Automatic torque

**Drive Technology** 

Thakita

BI



Guide rail adapter set

Fast

automatically changes

the cutting speed

according to load

conditions for an